

wineo

THAT'S FLOORING



DESIGN FLOORING

---

**NEW!**  
Now with  
wineo 400

**CONFIDENT IN STYLE.  
LIVING AND WORKING.**

# THAT'S FLOORING

## CONTENTS

Product advantages	06
Application areas	08
Product composition	10
Formats	14
Surfaces	16

### Collections

<b>wineo 400</b>	18
<b>wineo 600</b>	30
<b>wineo 800</b>	42

Accessories	60
Service	62
Awards & Quality	64

Collection overview	66
Symbols	69

### wineo 400

---

**NEW!**

#### **CONFIDENT IN STYLE. FEELING AT HOME.**

With the wineo 400, you can incorporate the latest global trends into your very own home – with unique designs and formats, as well as wood and stone styling options. For unlimited design possibilities and a personalised atmosphere in your home. The wineo 400 wood XL's special feature is that it is the first HDF XL Multi-Layer variant with a registered embossed surface on the market.



---

**CONFIDENT IN STYLE.**

**Where do we find inspiration? Where can we feel the spirit of the times? Our designers were looking for the latest trends - with the aim of creating extraordinary collections that are characterised in particular: by confidence in style.**

The design flooring by wineo gives every room a special flair. It derives its inspiration from the warmth of nature or the cool concrete facades of fascinating cities. It convinces with its design and functionality for residential and commercial buildings.



## PRODUCT ADVANTAGES

The permanently elastic wineo Design Flooring is impressively functional. Offering numerous product advantages and ease of use, it is a true favourite.



### DURABLE

wineo Design Flooring is **non-staining**. Even furniture and chair castors leave no trace.



### EASY CARE

Thanks to the sealed finish, the design flooring is very **easy to clean**.



### QUIET

The soft surface ensures **pleasant room acoustics**.



### WARM TO THE FEET

The design flooring feels **pleasantly warm** and is ideally suitable for lying, playing and living on.



### SUITABLE FOR UNDERFLOOR HEATING

Installed on underfloor heating, the design flooring conveys an extra sense of **cosy warmth**.



### SUITABLE FOR DAMP AREAS

All wineo Design Flooring for gluing or clicking in are perfectly suitable for damp rooms, such as the kitchen or bathroom, as they **do not swell on contact with water**.



### GENTLE ON THE ANKLES

Thanks to the **elastic surface**, the joints are protected.



### SLIP-RESISTANT



The **tested surface** is reliably safe with every step.

# APPLICATION AREAS

The wineo Design Flooring for gluing and clicking in, with utilisation classes between 23 and 42, is always the right choice – for domestic areas as much as for public buildings or the light industrial sector. Product thicknesses of 2 mm to 9 mm make it possible to install the design floor on virtually any technically adequate subsurface.

i

All wineo Design Flooring is ideal for damp areas.

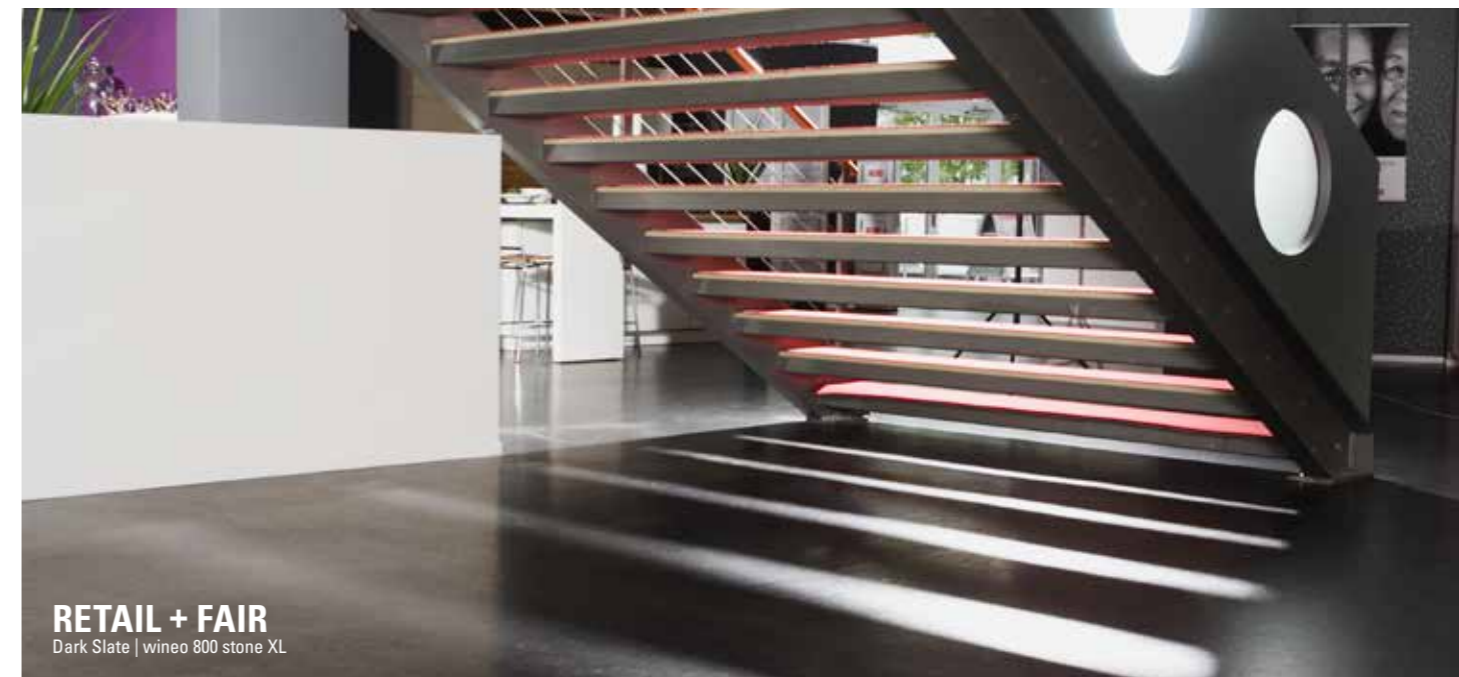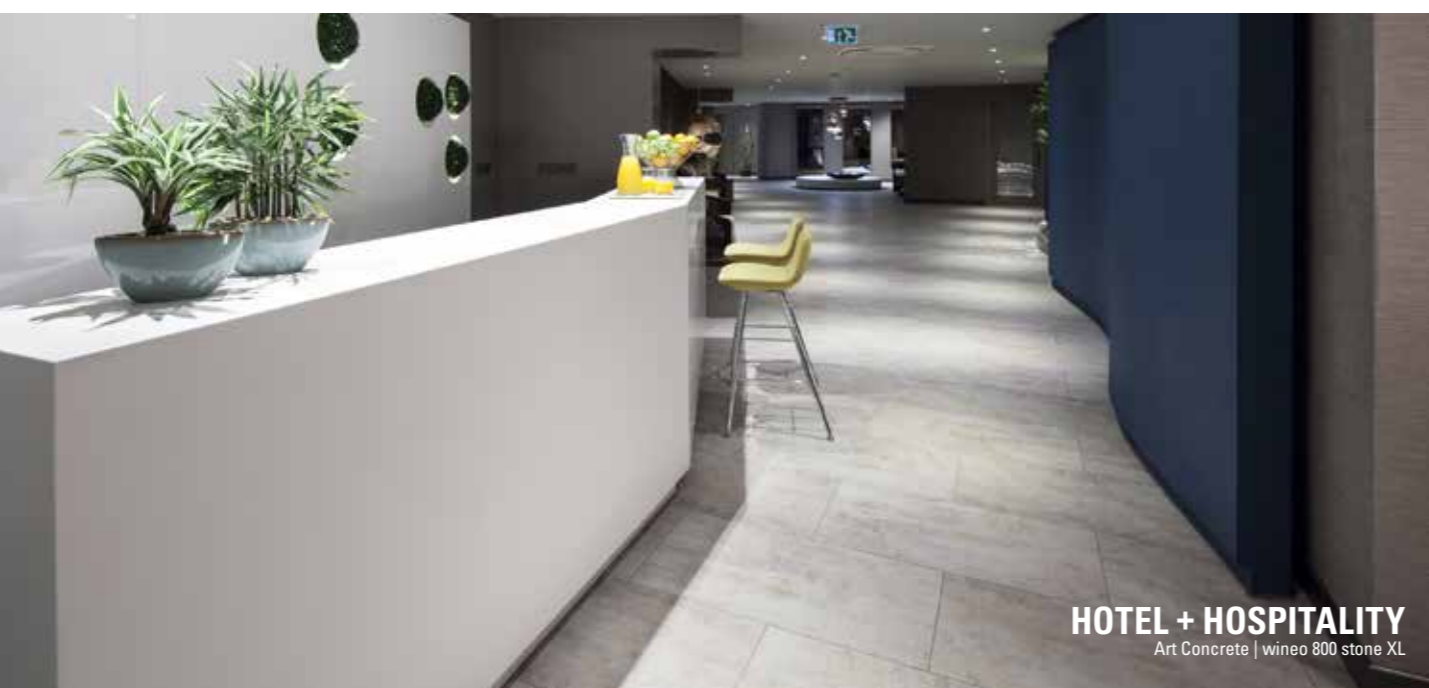




## PRODUCT COMPOSITION

Design flooring from wineo is just as varied as your requirements. Whether you are looking for flooring for a new building, renovation, at home or for commercial use – wineo has the right product for you.

### DESIGN FLOORING FOR GLUING



- very elastic
- minimal thickness of 2 mm to 2.5 mm
- particularly durable and long-lasting
- ideal for refurbishment work and damp areas

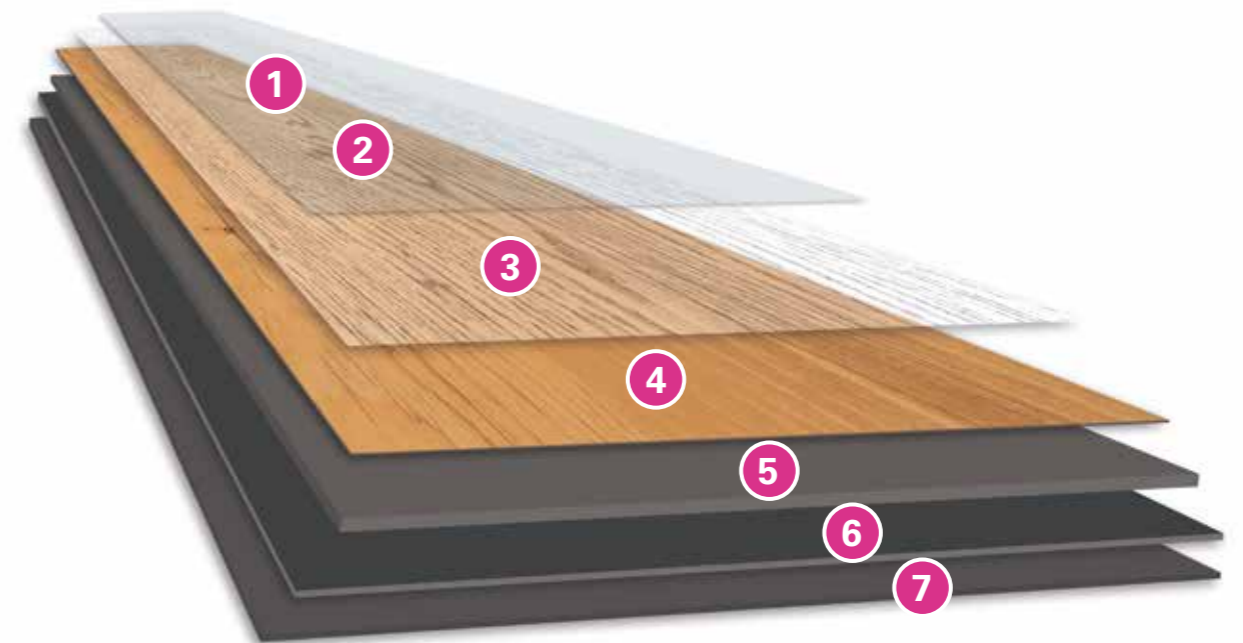


- 1 Surface seal**  
Protects the product and enables easy cleaning and maintenance.
- 2 Surface texture**  
A range of surface textures ensure an authentic feel and appearance.
- 3 Wear layer**  
Guarantees a high level of durability and is the basis for categorising flooring into the respective application areas.
- 4 Design**  
The decor film offers a host of design options.
- 5 Base layer**  
Lends the product a high level of dimensional stability and optimum point-load resistance.
- 6 Backing**  
With its waffle back texture, it is used to help ensure balance and optimal installation.
- 7 Insulation mat**  
**Available separately:** the silentPREMIUM self-adhesive insulation mat for bridging any unevenness and reducing walking and impact noise levels.

## DESIGN FLOORING FOR CLICKING IN



- very elastic
- available in a thickness of 4.5 mm to 5 mm
- connect locking for a particularly quick and tidy installation

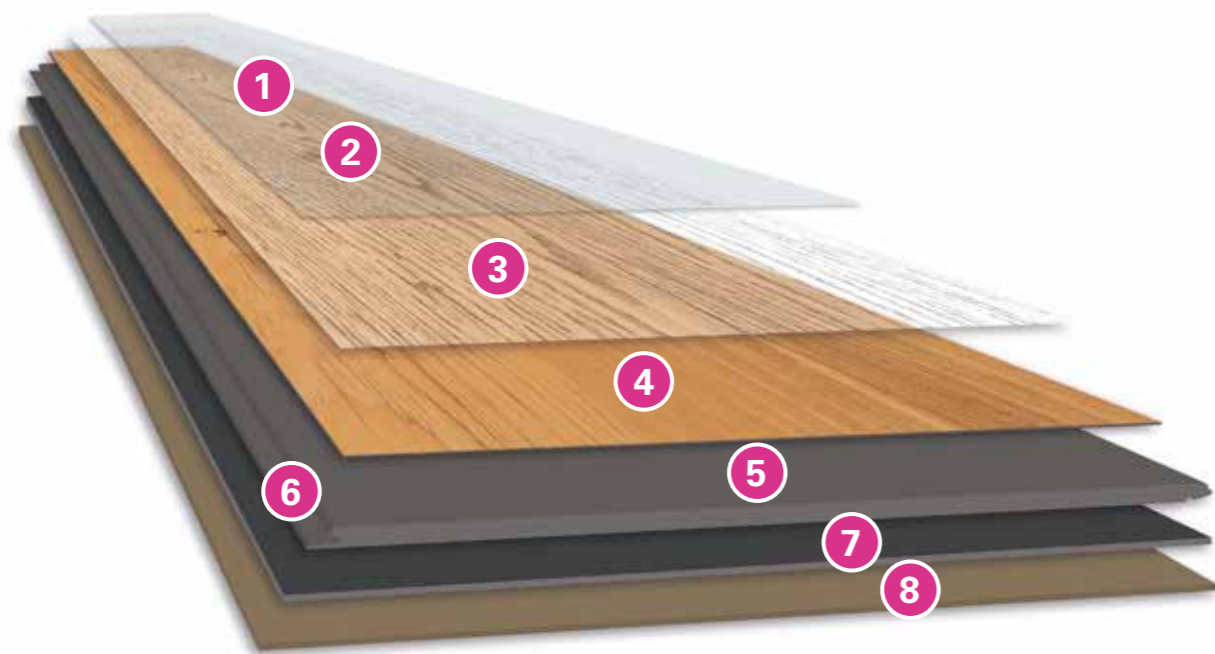


- 1 Surface seal**  
Protects the product and enables easy cleaning and maintenance.
- 2 Surface texture**  
A range of surface textures ensure an authentic feel and appearance.
- 3 Wear layer**  
Guarantees a high level of durability and is the basis for categorising flooring into the respective application areas.
- 4 Design**  
The decor film offers a host of design options.
- 5 Base layer with glass fibre reinforcement**  
Lends the product an especially high level of dimensional stability and optimum point-load resistance.

- 6 Profile connection**  
The Connect locking system was specially developed for elastic design flooring and enables planks to be clicked into each other without any problems.
- 7 Backing**  
With its waffle back texture, it is used to help ensure balance and optimal installation.
- 8 Insulation mat**  
**Available separately:** the silentCOMFORT insulation mat with non-slip effect for bridging any unevenness and reducing walking and impact noise levels.

## MULTI-LAYER DESIGN FLOORING FOR CLICKING IN



- design flooring surface on Aqua-Protect® HDF core board
- 9 mm thick for optimally bridging any unevenness in the substrate
- ideal for refurbishment work and damp areas
- particularly heat-resistant and dimensionally stable
- integrated Sound-Protect insulation mat for reducing walking and impact sound levels
- LocTec® locking for easy installation

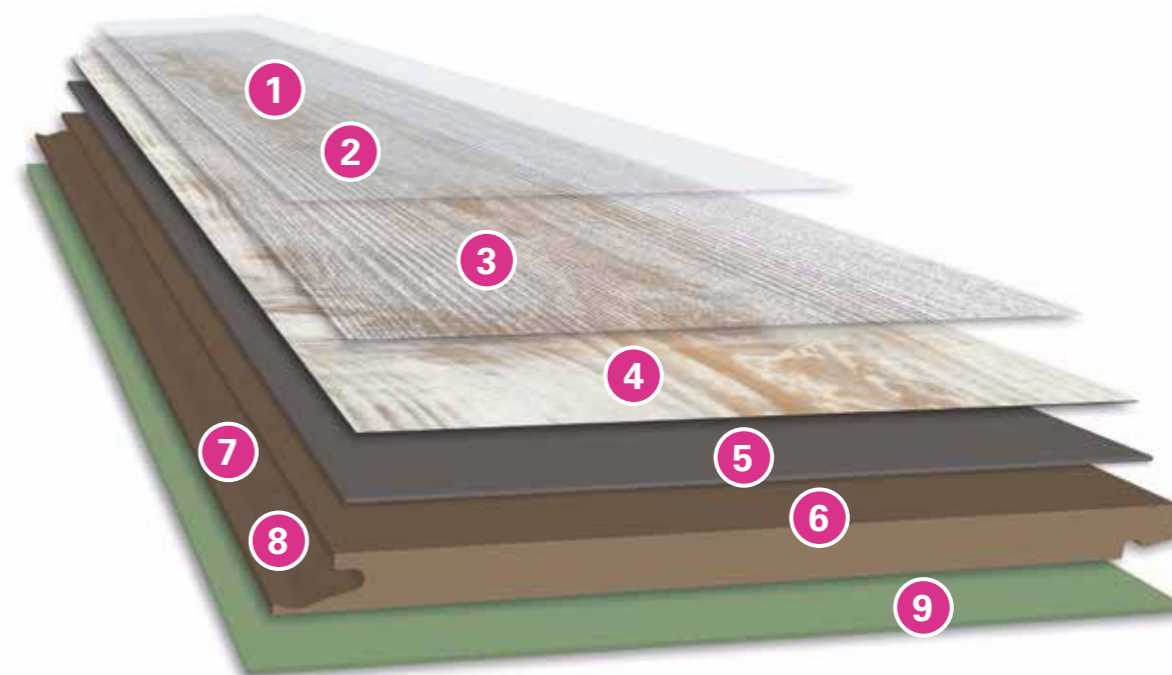




- 1 Surface seal**  
Protects the product and enables easy cleaning and maintenance.
- 2 Surface texture**  
A range of surface textures ensure an authentic feel and appearance.
- 3 Wear layer**  
Guarantees a high level of durability and is the basis for categorising flooring into the respective application areas.
- 4 Design**  
The decor film offers a host of design options.
- 5 Base layer**  
Lends the product a high level of dimensional stability and optimum point-load resistance.




- 6 Core board**  
The HDF Aqua-Protect® core board is swell-resistant.
- 7 Profile connection**  
Thanks to the tried-and-tested LocTec® locking system, planks can be clicked into one other without any problems.
- 8 Profile seal**  
A special profile seal protects the entire connection system from moisture.
- 9 Insulation mat**  
The walking and impact sound reducing system Sound-Protect Eco is already securely integrated into wineo Multi-Layer flooring.

# FORMATS

wood

	Glue	1200 × 180 mm
	Click	1212 × 187 mm
	Multi-Layer	1222 × 182 mm

wood XL

	Glue	1505 × 235 mm
	Click	1507 × 235 mm
	Multi-Layer	1520 × 230 mm

wood




	Glue	1200 × 180 mm
	Click	1212 × 187 mm

DLC00011: 1212 × 185 mm

wood XL



	Glue	1505 × 235 mm
	Click	1505 × 237 mm

stone



	Glue	609.6 × 304.8 mm
	Click	600 × 316 mm
	Multi-Layer	601 × 310 mm

## wineo 600

stone

	Glue	609.6 × 304.8 mm
	Click	600 × 317 mm

stone XL

	Glue	900 × 450 mm
	Click	914 × 480 mm



wood

	Glue	1200 × 180 mm
	Click	1212 × 185 mm

wood XL

	Glue	1505 × 235 mm
	Click	1505 × 237 mm


stone XL

	Glue	914.4 × 457.2 mm
	Click	914 × 480 mm

## wineo 800


tile

	Glue	457.2 × 457.2 mm
---	------	------------------

	Glue	914.4 × 457.2 mm
---	------	------------------

	Glue	914.4 × 914.4 mm
---	------	------------------

craft

	Glue	457.2 × 457.2 mm
---	------	------------------

	Glue	914.4 × 101.6 mm
---	------	------------------



# SURFACES

wineo Design Flooring comes in different surfaces, which are designed to suit the decors. Wood structures, for example, ensure that your floor feels particularly authentic. (Please refer to the labelling under the design pictures.)



Fine wooden pore



Rough wood structure



Exclusive wood structure



Sand structure



Rough sawn surface




Stone structure



Slate structure




Travertine



Registered embossed surface



Brushed structure



Handscraped I



Glossy surface

i

Designs with a registered embossed surface look especially authentic, as the surface structure is in sync with the wood grain. The expression of knots and lines in the wood gives the floor its unique originality.

3-in-1

## wineo 400

# CONFIDENT IN STYLE. FEELING AT HOME.

The wineo 400 is a true all-rounder for your home: every design is available for gluing, clicking in or as a Multi-Layer variant for clicking in – for maximum creative freedom. Discover 18 wood and 10 stone designs as well as 12 wood designs in XL with a high-quality registered embossed surface. The collection is the stylistically assured entry-level variant in the field of design flooring and is ideal for private use.

## wineo 400 wood | wood XL

**Installation type:** Glue  
**Product thickness:** 2 mm | 2 mm  
**Wear layer:** 0.3 mm | 0.3 mm  
**Planks / box:** 18/3.89 m<sup>2</sup> | 12/4.24 m<sup>2</sup>



**Installation type:** Click  
**Product thickness:** 4.5 mm | 4.5 mm  
**Wear layer:** 0.3 mm | 0.3 mm  
**Planks / box:** 10/2.27 m<sup>2</sup> | 6/2.12 m<sup>2</sup>



**Installation type:** Click (Multi-Layer)\*  
**Core board:** Aqua-Protect®  
**Product thickness:** 9 mm | 9 mm  
**Wear layer:** 0.3 mm | 0.3 mm  
**Planks / box:** 9/2.00 m<sup>2</sup> | 6/2.10 m<sup>2</sup>



wood XL with registered embossed surface

## wineo 400 stone

**Installation type:** Glue  
**Product thickness:** 2 mm  
**Wear layer:** 0.3 mm  
**Tiles / box:** 18/3.34 m<sup>2</sup>



**Installation type:** Click  
**Product thickness:** 4.5 mm  
**Wear layer:** 0.3 mm  
**Tiles / box:** 12/2.28 m<sup>2</sup>



**Installation type:** Click (Multi-Layer)\*  
**Core board:** Aqua-Protect®  
**Product thickness:** 9 mm  
**Wear layer:** 0.3 mm  
**Tiles / box:** 9/1.68 m<sup>2</sup>



**Inspiration Oak Clear**  
 wineo 400 wood | DB00113  
 wineo 400 wood | DLC00113  
 wineo 400 wood | MLD00113





**Dream Pine Light** Glue: DB00105  
 1 strip | Rough wood structure Click: DLC00105  
 Skirting board 19/58: 30060435 (white) Click (Multi-Layer): MLD00105



**Moonlight Pine Pale** Glue: DB00104  
 1 strip | Rough wood structure Click: DLC00104  
 Skirting board 19/58: 30060435 (white) Click (Multi-Layer): MLD00104



**Inspiration Oak Clear** Glue: DB00113  
 1 strip | Rough wood structure Click: DLC00113  
 Skirting board 19/58: 30060568 Click (Multi-Layer): MLD00113



**Compassion Oak Tender** Glue: DB00109  
 1 strip | Rough wood structure Click: DLC00109  
 Skirting board 19/58: 30060435 (white) Click (Multi-Layer): MLD00109



**Desire Oak Light** Glue: DB00108  
 1 strip | Rough wood structure Click: DLC00108  
 Skirting board 19/58: 30060563 Click (Multi-Layer): MLD00108



**Grace Oak Smooth** Glue: DB00106  
 1 strip | Rough wood structure Click: DLC00106  
 Skirting board 19/58: 30060561 Click (Multi-Layer): MLD00106



**Paradise Oak Essential** Glue: DB00112  
 1 strip | Rough wood structure Click: DLC00112  
 Skirting board 19/58: 30060567 Click (Multi-Layer): MLD00112



**Energy Oak Warm** Glue: DB00114  
 1 strip | Rough wood structure Click: DLC00114  
 Skirting board 19/58: 30060569 Click (Multi-Layer): MLD00114



**Embrace Oak Grey** Glue: DB00110  
 1 strip | Rough wood structure Click: DLC00110  
 Skirting board 19/58: 30060565 Click (Multi-Layer): MLD00110



**Spirit Oak Silver** Glue: DB00115  
 1 strip | Rough wood structure Click: DLC00115  
 Skirting board 19/58: 30060570 Click (Multi-Layer): MLD00115



**Adventure Oak Rustic** Glue: DB00111  
 1 strip | Rough wood structure Click: DLC00111  
 Skirting board 19/58: 30060566 Click (Multi-Layer): MLD00111



**Summer Oak Golden** Glue: DB00118  
 1 strip | Rough wood structure Click: DLC00118  
 Skirting board 19/58: 30060573 Click (Multi-Layer): MLD00118



**Starlight Oak Soft** Glue: DB00116  
 1 strip | Rough wood structure Click: DLC00116  
 Skirting board 19/58: 30060571 Click (Multi-Layer): MLD00116



**Miracle Oak Dry** Glue: DB00117  
 1 strip | Rough wood structure Click: DLC00117  
 Skirting board 19/58: 30060572 Click (Multi-Layer): MLD00117



**Soul Apple Mellow** Glue: DB00107  
 1 strip | Rough wood structure Click: DLC00107  
 Skirting board 19/58: 30060562 Click (Multi-Layer): MLD00107



**Romance Oak Brilliant** Glue: DB00119  
 1 strip | Rough wood structure Click: DLC00119  
 Skirting board 19/58: 30060574 Click (Multi-Layer): MLD00119



Eternity = various plank colours in one box



**Eternity Oak Grey**  
1 strip | Rough wood structure  
Skirting board 19/58: 30060435 (white)

**Glue:** DB00121  
**Click:** DLC00121  
**Click (Multi-Layer):** MLD00121



**Eternity Oak Brown**  
1 strip | Rough wood structure  
Skirting board 19/58: 30060435 (white)

**Glue:** DB00120  
**Click:** DLC00120  
**Click (Multi-Layer):** MLD00120



**Eternity Oak Grey**  
wineo 400 wood | DB00121  
wineo 400 wood | DLC00121  
wineo 400 wood | MLD00121

# wineo 400 wood XL

WITH REGISTERED EMBOSSED SURFACE



**Emotion Oak Rustic**  
1 strip | [Registered embossed surface](#)  
Skirting board 19/58: 30060576  
**Glue:** DB00123  
**Click:** DLC00123  
**Click (Multi-Layer):** MLD00123



**Luck Oak Sandy**  
1 strip | [Registered embossed surface](#)  
Skirting board 19/58: 30060580  
**Glue:** DB00127  
**Click:** DLC00127  
**Click (Multi-Layer):** MLD00127



**Silence Oak Beige**  
1 strip | [Registered embossed surface](#)  
Skirting board 19/58: 30060577  
**Glue:** DB00124  
**Click:** DLC00124  
**Click (Multi-Layer):** MLD00124



**Kindness Oak Pure**  
1 strip | [Registered embossed surface](#)  
Skirting board 19/58: 30060578  
**Glue:** DB00125  
**Click:** DLC00125  
**Click (Multi-Layer):** MLD00125



**Ambition Oak Calm**  
1 strip | [Registered embossed surface](#)  
Skirting board 19/58: 30060575  
**Glue:** DB00122  
**Click:** DLC00122  
**Click (Multi-Layer):** MLD00122



**Wish Oak Smooth**  
1 strip | [Registered embossed surface](#)  
Skirting board 19/58: 30060584  
**Glue:** DB00131  
**Click:** DLC00131  
**Click (Multi-Layer):** MLD00131



**Liberation Oak Timeless**  
1 strip | [Registered embossed surface](#)  
Skirting board 19/58: 30060581  
**Glue:** DB00128  
**Click:** DLC00128  
**Click (Multi-Layer):** MLD00128



**Joy Oak Tender**  
1 strip | [Registered embossed surface](#)  
Skirting board 19/58: 30060579  
**Glue:** DB00126  
**Click:** DLC00126  
**Click (Multi-Layer):** MLD00126



**Memory Oak Silver**  
1 strip | [Registered embossed surface](#)  
Skirting board 19/58: 30060585  
**Glue:** DB00132  
**Click:** DLC00132  
**Click (Multi-Layer):** MLD00132



**Valour Oak Smokey**  
1 strip | [Registered embossed surface](#)  
Skirting board 19/58: 30060586  
**Glue:** DB00133  
**Click:** DLC00133  
**Click (Multi-Layer):** MLD00133



**Comfort Oak Mellow**  
1 strip | [Registered embossed surface](#)  
Skirting board 19/58: 30060582  
**Glue:** DB00129  
**Click:** DLC00129  
**Click (Multi-Layer):** MLD00129



**Intuition Oak Brown**  
1 strip | [Registered embossed surface](#)  
Skirting board 19/530060583  
**Glue:** DB00130  
**Click:** DLC00130  
**Click (Multi-Layer):** MLD00130



**Harmony Stone Sandy** Glue: DB00134  
 Sand structure Click: DLC00134 (real joint)  
 Skirting board 19/58: 30060435 (white) Click (Multi-Layer): MLD00134



**Magic Stone Cloudy** Glue: DB00136  
 Travertine Click: DLC00136 (real joint)  
 Skirting board 19/58: 30060435 (white) Click (Multi-Layer): MLD00136



**Patience Concrete Pure** Glue: DB00139  
 Travertine Click: DLC00139 (real joint)  
 Skirting board 19/58: 30060435 (white) Click (Multi-Layer): MLD00139



**Wisdom Concrete Dusky** Glue: DB00140  
 Sand structure Click: DLC00140 (real joint)  
 Skirting board 19/58: 30060435 (white) Click (Multi-Layer): MLD00140



**Fairytale Stone Pale** Glue: DB00142  
 Sand structure Click: DLC00142 (real joint)  
 Skirting board 19/58: 30060435 (white) Click (Multi-Layer): MLD00142



**Fortune Stone Rusty** Glue: DB00143  
 Travertine Click: DLC00143 (real joint)  
 Skirting board 19/58: 30060435 (white) Click (Multi-Layer): MLD00143



**Vision Concrete Chill** Glue: DB00135  
 Sand structure Click: DLC00135 (real joint)  
 Skirting board 19/58: 30060435 (white) Click (Multi-Layer): MLD00135



**Courage Stone Grey** Glue: DB00137  
 Sand structure Click: DLC00137 (real joint)  
 Skirting board 19/58: 30060435 (white) Click (Multi-Layer): MLD00137



**Glamour Concrete Modern** Glue: DB00141  
 Sand structure Click: DLC00141 (real joint)  
 Skirting board 19/58: 30060435 (white) Click (Multi-Layer): MLD00141



**Hero Stone Gloomy** Glue: DB00138  
 Sand structure Click: DLC00138 (real joint)  
 Skirting board 19/58: 30060435 (white) Click (Multi-Layer): MLD00138



## wineo 600

# CONFIDENT IN STYLE. DISPLAYING VARIETY.

With a wear layer of 0.4 mm, wineo 600 for gluing or clicking in is suitable for a broad range of applications. The 24 wood designs and 8 stone looks, some of which have real joints, are not only suitable for commercial property but also for private customers, who appreciate resilient flooring in trendy designs.



## wineo 600 wood | wood XL

**Installation type:** Glue  
**Product thickness:** 2 mm | 2 mm  
**Wear layer:** 0.4 mm | 0.4 mm  
**Planks / box:** 18/3.89 m<sup>2</sup> | 12/4.24 m<sup>2</sup>



**Installation type:** Click  
**Product thickness:** 5 mm | 5 mm  
**Wear layer:** 0.4 mm | 0.4 mm  
**Planks / box:** 8/1.81 m<sup>2</sup> | 6/2.14 m<sup>2</sup>  
 8/1.79 m<sup>2</sup> (DLC00011)



DLC00011: 1212 x 185 mm



## wineo 600 stone | stone XL

**Installation type:** Glue  
**Product thickness:** 2 mm | 2 mm  
**Wear layer:** 0.4 mm | 0.4 mm  
**Tiles / box:** 18/3.34 m<sup>2</sup> | 12/4.86 m<sup>2</sup>



**Installation type:** Click  
**Product thickness:** 5 mm | 5 mm  
**Wear layer:** 0.4 mm | .4 mm  
**Tiles / box:** 10/1.90 m<sup>2</sup> | 6/2.63 m<sup>2</sup>





**Patchwork**  
2 strip | Rough sawn surface  
Skirting board 19/58: 30060435 (white)

**Glue:** DB00011  
**Click:** DLC00011



**Chateau White**  
1 strip | Rough sawn surface  
Skirting board 19/58: 30060448

**Glue:** DB00001  
**Click:** DLC00001



**Polaris**  
1 strip | Handscraped I  
Skirting board 19/58: 30060435 (white)

**Glue:** DB00012  
**Click:** DLC00012



**Chateau Grey**  
1 strip | Rough sawn surface  
Skirting board 19/58: 30060450

**Glue:** DB00003  
**Click:** DLC00003



**Toscany Pine Grey**  
1 strip | Rough wood structure  
Skirting board 19/58: 30060454

**Glue:** DB00008  
**Click:** DLC00008



**Aurelia Grey**  
1 strip | **Registered embossed surface**  
Skirting board 19/58: 30060452

**Glue:** DB00005  
**Click:** DLC00005



**Venero Oak Brown**  
1 strip | Rough sawn surface  
Skirting board 19/58: 30060451

**Glue:** DB00014  
**Click:** DLC00014



**Aurelia Provence**  
1 strip | **Registered embossed surface**  
Skirting board 19/58: 30060451

**Glue:** DB00004  
**Click:** DLC00004



**Toscany Pine**  
1 strip | Rough wood structure  
Skirting board 19/58: 30060454

**Glue:** DB00007  
**Click:** DLC00007



**Calm Oak Nature**  
1 strip | Handscraped I  
Skirting board 19/58: 30060456

**Glue:** DB00009  
**Click:** DLC00009



**Chateau Brown**  
1 strip | Rough sawn surface  
Skirting board 19/58: 30060449

**Glue:** DB00002  
**Click:** DLC00002



**Venero Oak Beige**  
1 strip | Rough sawn surface  
Skirting board 19/58: 30060458

**Glue:** DB00013  
**Click:** DLC00013



**Calm Oak Cream**  
1 strip | Handscraped I  
Skirting board 19/58: 30060457

**Glue:** DB00010  
**Click:** DLC00010



**Aurelia Cream**  
1 strip | **Registered embossed surface**  
Skirting board 19/58: 30060453

**Glue:** DB00006  
**Click:** DLC00006

# wineo 600 wood XL



**Aumera Oak Grey\***  
1 strip | **Registered embossed surface**  
Skirting board 19/58: 30060466

**Glue:** DB00029  
**Click:** DLC00029



**Scandic Grey**  
1 strip | Rough wood structure  
Skirting board 19/58: 30060462

**Glue:** DB00025  
**Click:** DLC00025



**Scandic White**  
1 strip | Rough wood structure  
Skirting board 19/58: 30060463

**Glue:** DB00026  
**Click:** DLC00026



**Victoria Oak White\***  
1 strip | **Registered embossed surface**  
Skirting board 19/58: 30060469

**Glue:** DB00032  
**Click:** DLC00032



**Woodstock Cream**  
1 strip | Rough wood structure  
Skirting board 19/58: 30060461

**Glue:** DB00024  
**Click:** DLC00024



**Victoria Oak Native\***  
1 strip | **Registered embossed surface**  
Skirting board 19/58: 30060458

**Glue:** DB00031  
**Click:** DLC00031



**Aumera Oak Native\***  
1 strip | **Registered embossed surface**  
Skirting board 19/58: 30060467

**Glue:** DB00028  
**Click:** DLC00028



**Victoria Oak Grey\***  
1 strip | **Registered embossed surface**  
Skirting board 19/58: 30060467

**Glue:** DB00030  
**Click:** DLC00030



**Woodstock Honey**  
1 strip | Rough wood structure  
Skirting board 19/58: 30060460

**Glue:** DB00023  
**Click:** DLC00023



**Aumera Oak Dark\***  
1 strip | **Registered embossed surface**  
Skirting board 19/58: 30060464

**Glue:** DB00027  
**Click:** DLC00027



Lava Grey  
wineo 600 stone | DB00015  
wineo 600 stone | DLC00015



**Polar Travertine**  
Sand structure



**Silver Slate**  
Sand structure  
**Glue: DB00018**  
**Click: DLC00018 (real joint)**



**Lava Grey**  
Sand structure



**Lava Black**  
Sand structure  
**Glue: DB00016**  
**Click: DLC00016**

**Glue: DB00017**  
**Click: DLC00017 (real joint)**

**Glue: DB00015**  
**Click: DLC00015**

# wineo 600 stone XL



**Navajo Cream**  
Stone structure

**Glue:** DB00019  
**Click:** DLC00019



**Navajo Grey**  
Stone structure

**Glue:** DB00020  
**Click:** DLC00020



**Brooklyn Day**  
Stone structure

**Glue:** DB00021  
**Click:** DLC00021



**Brooklyn Night**  
Stone structure

**Glue:** DB00022  
**Click:** DLC00022



**Brooklyn Night**  
wineo 600 stone XL | DB00022  
wineo 600 stone XL | DLC00022


**Anna, Stylist**

»As a stylist, I am on my feet all day long. So I appreciate every single minute of being on an elastic design flooring, which is gentle on the joints.«

**wineo 800****CONFIDENT IN STYLE.  
MAKING AN IMPACT.**

Developed with the help of trend scouts, wineo 800 provides plenty of impressive new inspiration. The collection offers 42 innovative designs for gluing or clicking in, in a total of 8 different formats. With a wear layer of 0.55 mm, wineo 800 is a premium design covering and is therefore ideal for commercial property and discerning private customers.

Infinity Light Mixed  
wineo 800 craft | DB00072

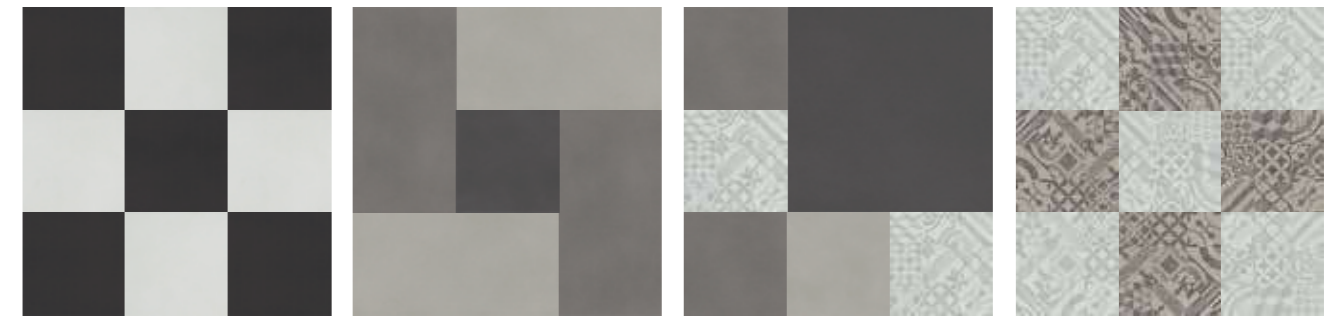


tile L


tile L | tile XL

tile L | tile XXL | craft


craft

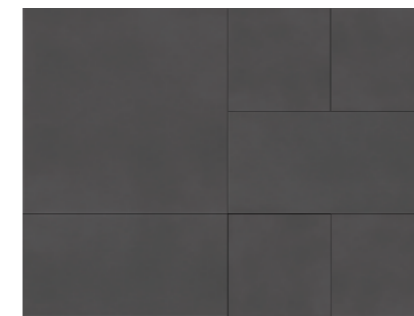


tile L | tile XL | tile XXL

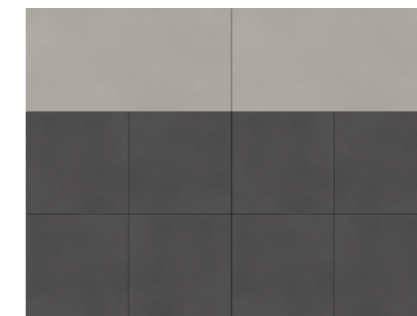


tile L | tile XL

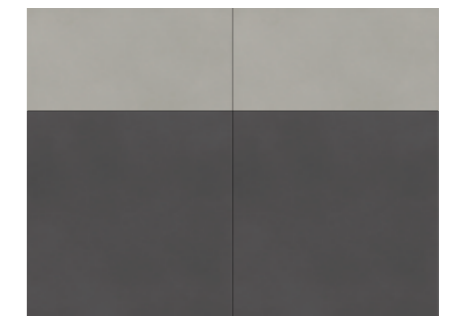

tile L | tile XXL

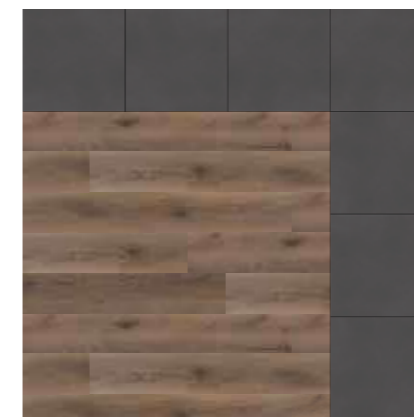

wood | tile

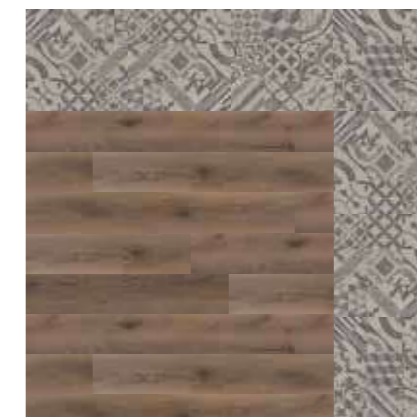

wood | craft



tile L | craft



tile XL



tile XL



wood | craft



craft



craft

# COMBINATIONS

wineo 800, in particular, offers plenty of opportunities for creatively combining various decors and formats for gluing. This means that any floor can be transformed, making it truly distinctive and unique.





# SCANDINAVIAN LIGHT WOOD

# NATURAL WARM WOOD



**Copenhagen Frosted Pine**  
1 strip | Handscraped I  
Skirting board 19/58: 30060550

**Glue:** DB00076  
**Click:** DLC00076



**Gothenburg Calm Oak**  
1 strip | Exclusive wood structure  
Skirting board 19/58: 30060556

**Glue:** DB00077  
**Click:** DLC00077



**Salt Lake Oak**  
1 strip | Exclusive wood structure  
Skirting board 19/58: 30060549

**Glue:** DB00079  
**Click:** DLC00079



**Wheat Golden Oak**  
1 strip | Exclusive wood structure  
Skirting board 19/58: 30060552

**Glue:** DB00080  
**Click:** DLC00080



**Riga Vibrant Pine**  
1 strip | Exclusive wood structure  
Skirting board 19/58: 30060554

**Glue:** DB00082  
**Click:** DLC00082



**Honey Warm Maple**  
1 strip | Exclusive wood structure  
Skirting board 19/58: 30060553

**Glue:** DB00081  
**Click:** DLC00081



**Clay Calm Oak**  
1 strip | **Registered embossed surface**  
Skirting board 19/58: 30060540

**Glue:** DB00062  
**Click:** DLC00062



**Helsinki Rustic Oak**  
1 strip | **Registered embossed surface**  
Skirting board 19/58: 30060546

**Glue:** DB00068  
**Click:** DLC00068



**Lund Dusty Oak**  
1 strip | **Registered embossed surface**  
Skirting board 19/58: 30060543

**Glue:** DB00065  
**Click:** DLC00065



**Corn Rustic Oak**  
1 strip | **Registered embossed surface**  
Skirting board 19/58: 30060542

**Glue:** DB00064  
**Click:** DLC00064



**Mud Rustic Oak**  
1 strip | **Registered embossed surface**  
Skirting board 19/58: 30060541

**Glue:** DB00063  
**Click:** DLC00063


XL

XL

XL

XL

XL

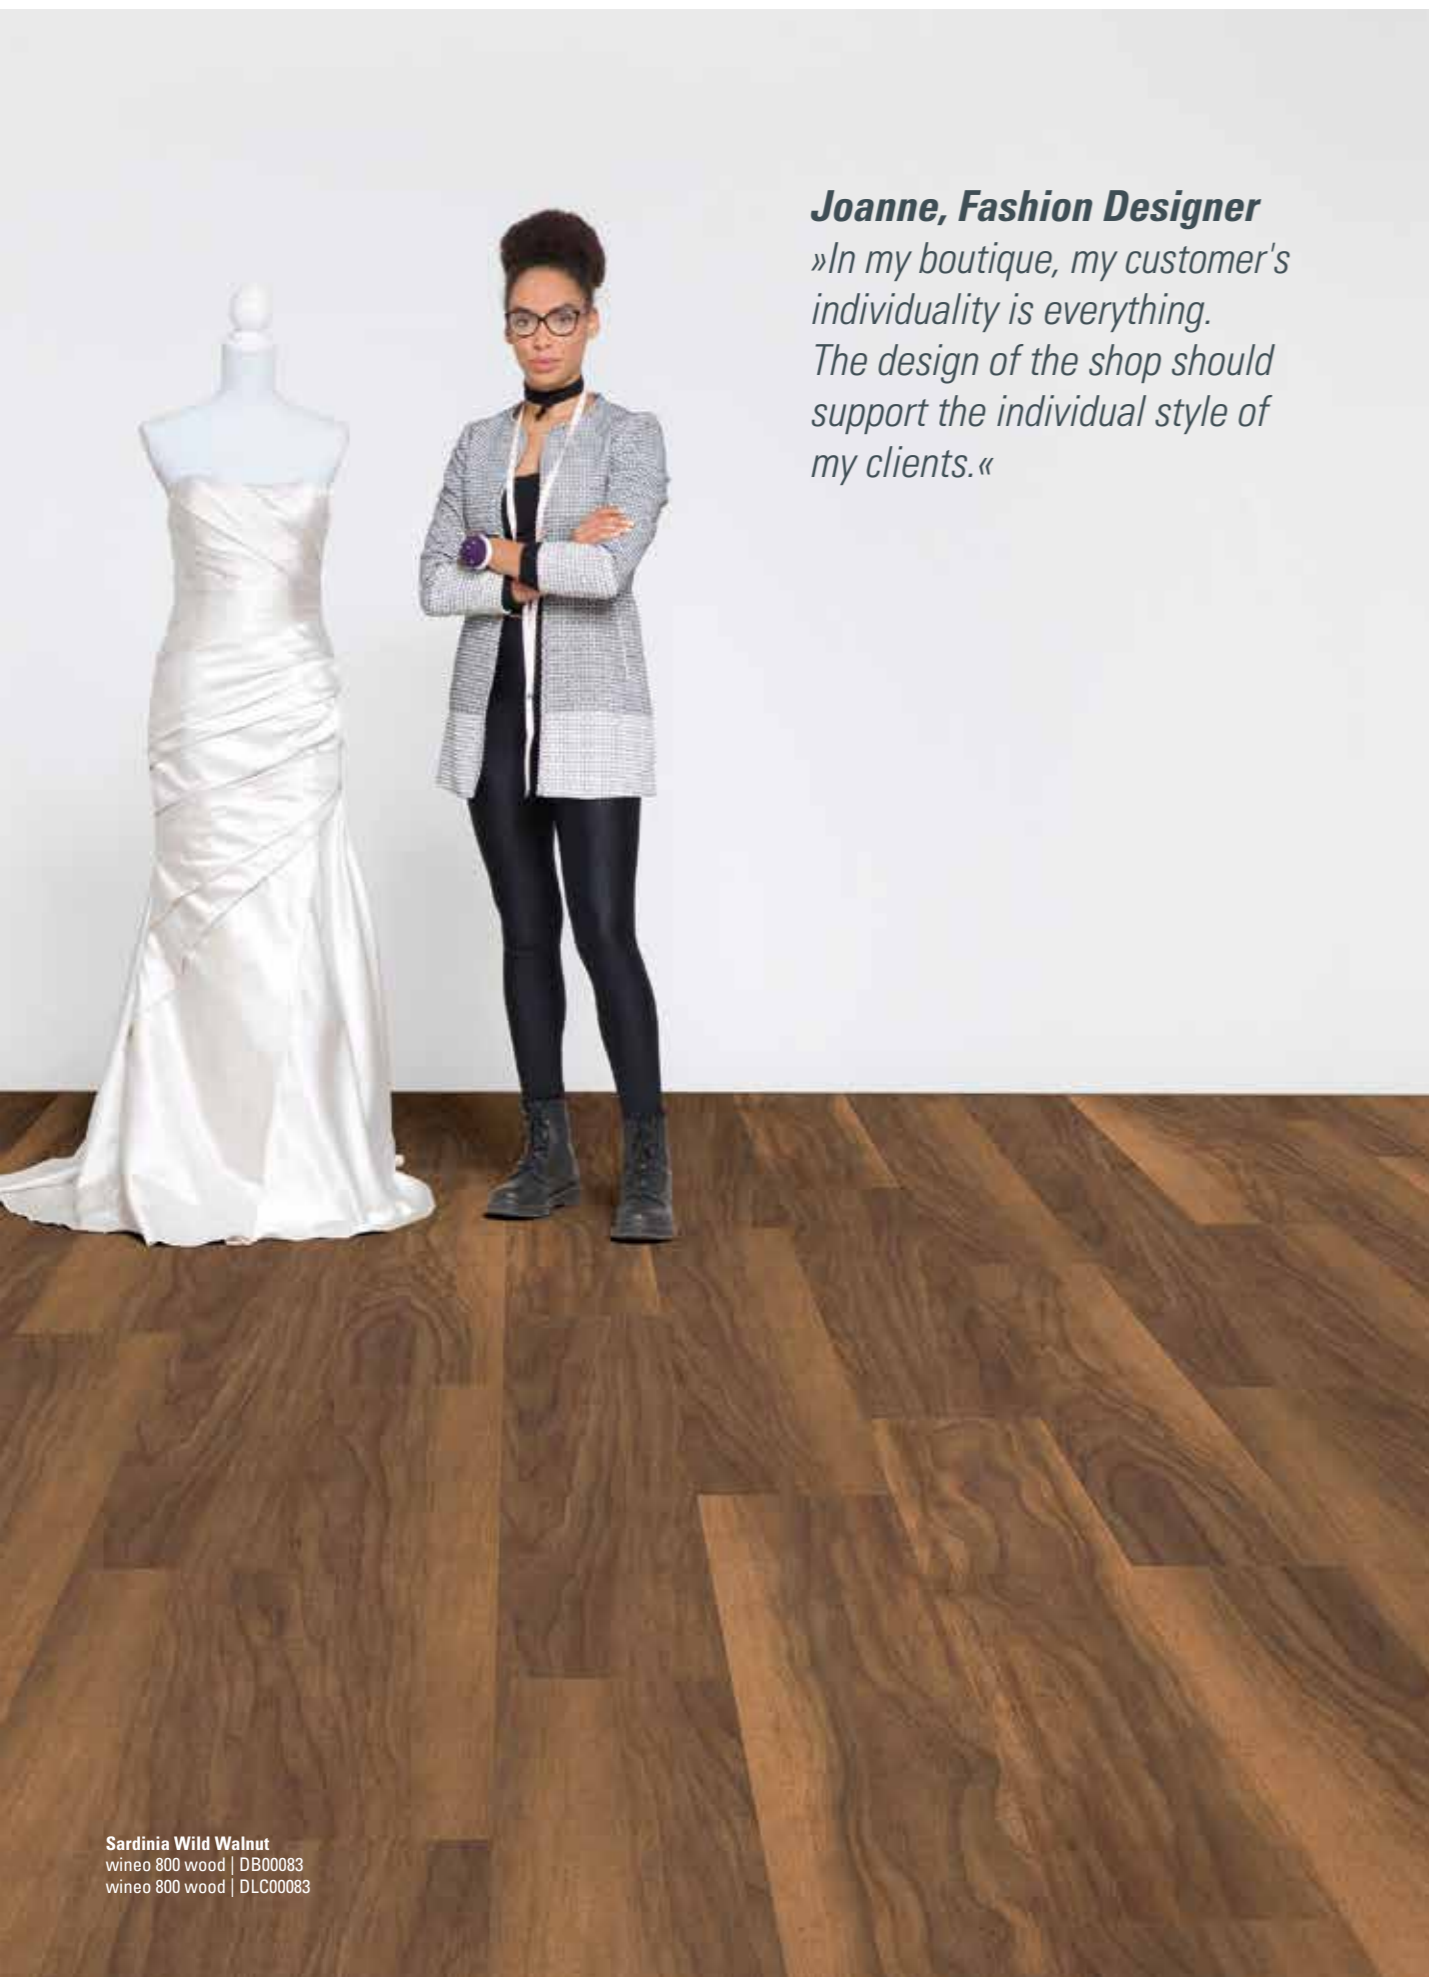

**Joanne, Fashion Designer**  
*»In my boutique, my customer's individuality is everything. The design of the shop should support the individual style of my clients.«*

Sardinia Wild Walnut  
 wineo 800 wood | DB00083  
 wineo 800 wood | DLC00083

## MEDITERRANEAN DARK WOOD



**Balearic Wild Oak**  
 1 strip | Exclusive wood structure  
 Skirting board 19/58: 30060557

Glue: DB00078  
 Click: DLC00078



**Crete Vibrant Oak**  
 1 strip | Exclusive wood structure  
 Skirting board 19/58: 30060558

Glue: DB00075  
 Click: DLC00075



**Sardinia Wild Walnut**  
 1 strip | Exclusive wood structure  
 Skirting board 19/58: 30060555

Glue: DB00083  
 Click: DLC00083



**Cyprus Dark Oak**  
 1 strip | **Registered embossed surface**  
 Skirting board 19/58: 30060544

Glue: DB00066  
 Click: DLC00066



**Santorini Deep Oak**  
 1 strip | **Registered embossed surface**  
 Skirting board 19/58: 30060539

Glue: DB00061  
 Click: DLC00061



**Ponza Smoky Oak**  
 1 strip | **Registered embossed surface**  
 Skirting board 19/58: 30060545

Glue: DB00067  
 Click: DLC00067




**Sicily Dark Oak**  
 1 strip | **Registered embossed surface**  
 Skirting board 19/58: 30060547


Glue: DB00069  
 Click: DLC00069

## wineo 800 stone XL

**Installation type:** Glue  
**Product thickness:** 2.5 mm  
**Wear layer:** 0.55 mm  
**Tiles / box:** 10/4.18 m<sup>2</sup>




**Installation type:** Click  
**Product thickness:** 5 mm  
**Wear layer:** 0.55 mm  
**Tiles / box:** 6/2.63 m<sup>2</sup>




## wineo 800 tile L | tile XL | tile XXL


**Installation type:** Glue  
**Product thickness:** 2.5 mm  
**Wear layer:** 0.55 mm  
**Tiles / box:** 16/3.34 m<sup>2</sup>



**Installation type:** Glue  
**Product thickness:** 2.5 mm  
**Wear layer:** 0.55 mm  
**Tiles / box:** 10/4.18 m<sup>2</sup>




**Installation type:** Glue  
**Product thickness:** 2.5 mm  
**Wear layer:** 0.55 mm  
**Tiles / box:** 6/5.02 m<sup>2</sup>



## wineo 800 craft

**Installation type:** Glue  
**Product thickness:** 2.5 mm  
**Wear layer:** 0.55 mm  
**Tiles / box:** 16/3.34 m<sup>2</sup>




**Installation type:** Glue  
**Product thickness:** 2.5 mm  
**Wear layer:** 0.55 mm  
**Plank / box:** 20/1.86 m<sup>2</sup>




### Lucas, Hotel Manager

»There's always a lot going on in our lobby. The design flooring successfully creates a peaceful atmosphere, both acoustically and visually.«

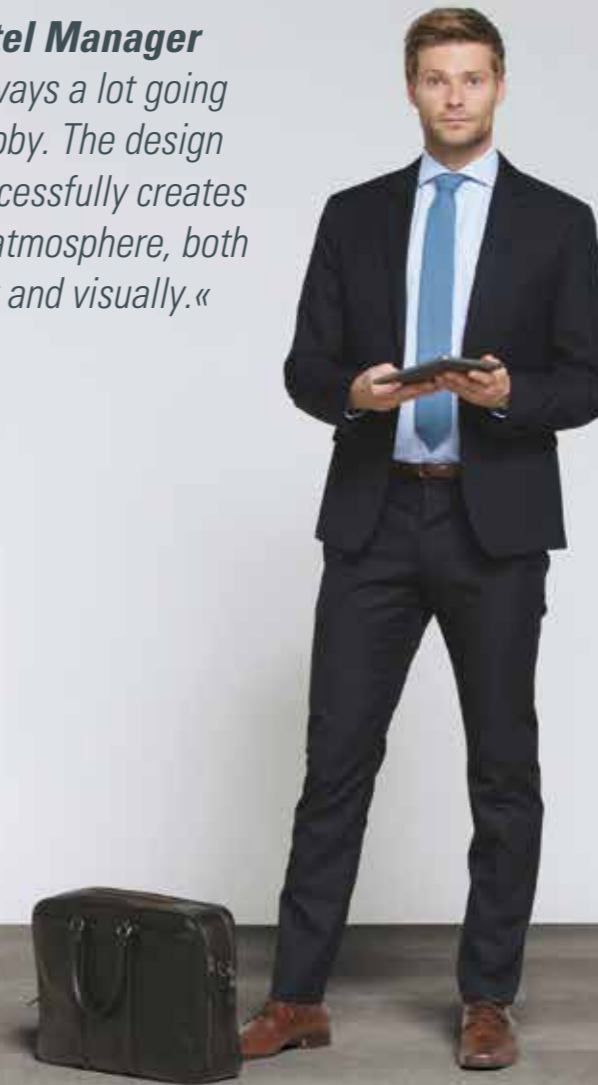

Raw Concrete  
 wineo 800 stone XL | DB00088  
 wineo 800 stone XL | DLC00088

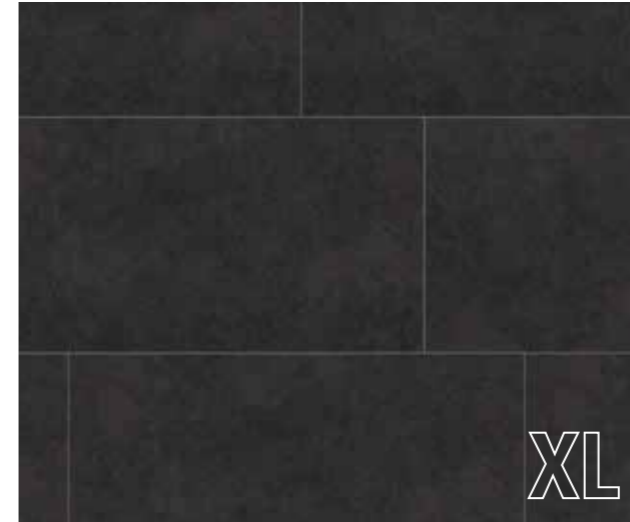

**Dark Slate**  
1-strip | Slate structure  
Skirting board 19/58: 30060435 (white)

**Glue:** DB00085  
**Click:** DLC00085 (real joint)



**Silver Slate**  
1-strip | Slate structure  
Skirting board 19/58: 30060435 (white)

**Glue:** DB00087  
**Click:** DLC00087 (real joint)



**Raw Concrete**  
1 strip | Sand structure  
Skirting board 19/58: 30060435 (white)

**Glue:** DB00088  
**Click:** DLC00088



**Rough Concrete**  
1 strip | Sand structure  
Skirting board 19/58: 30060435 (white)

**Glue:** DB00089  
**Click:** DLC00089



**Copper Slate**  
1-strip | Stone structure  
Skirting board 19/58: 30060435 (white)

**Glue:** DB00091  
**Click:** DLC00091 (real joint)



**Light Sand**  
1-strip | Stone structure  
Skirting board 19/58: 30060435 (white)

**Glue:** DB00095  
**Click:** DLC00095 (real joint)



**Calm Concrete**  
1 strip | Sand structure  
Skirting board 19/58: 30060435 (white)

**Glue:** DB00094  
**Click:** DLC00094



**Heavy Metal**  
1 strip | Glossy surface  
Skirting board 19/58: 30060435 (white)

**Glue:** DB00084  
**Click:** DLC00084 (real joint)



**Art Concrete**  
1 strip | Sand structure  
Skirting board 19/58: 30060435 (white)

**Glue:** DB00086  
**Click:** DLC00086 (real joint)




**White Marble**  
1 strip | Sand structure  
Skirting board 19/58: 30060435 (white)


**Glue:** DB00090  
**Click:** DLC00090

**John, Architect**


»Today's requirements are high. Flooring is a design element, which has to fulfill two major requirements: functionality and design – both to a very high quality.«

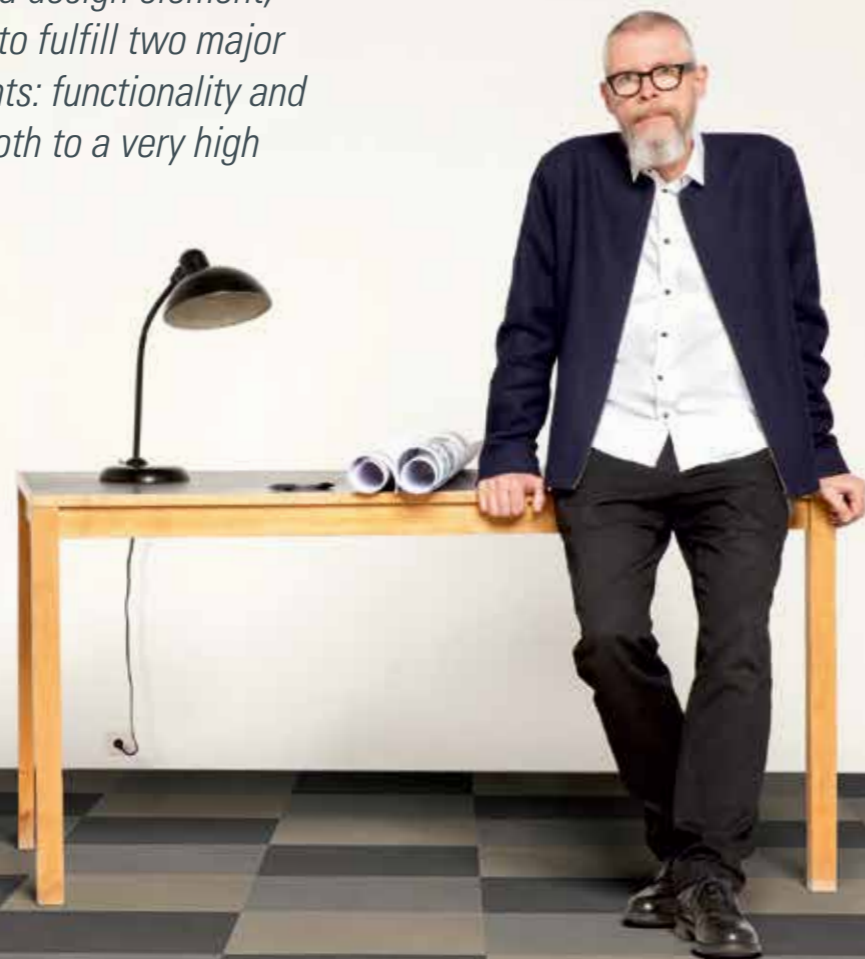


Solid Dark | Solid Grey | Solid Umbra  
 wineo 800 tile | DB00096-1  
 wineo 800 tile | DB00097-1  
 wineo 800 tile | DB00098-1

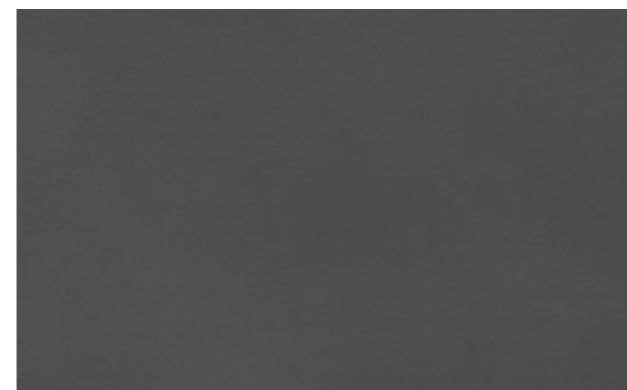**Solid Dark**


Sand structure  
 Skirting board 19/58: 30060435 (white)

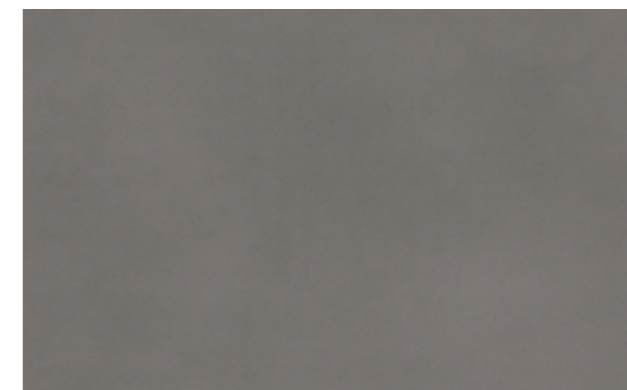**Glue:** DB00096-1 (XXL)**Glue:** DB00096-2 (XL)**Glue:** DB00096-3 (L)**Solid Grey**


Sand structure  
 Skirting board 19/58: 30060435 (white)

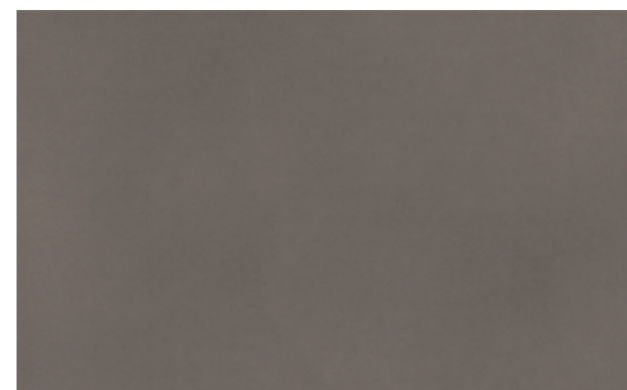**Glue:** DB00097-1 (XXL)**Glue:** DB00097-2 (XL)**Glue:** DB00097-3 (L)**Solid Taupe**

Sand structure  
 Skirting board 19/58: 30060435 (white)

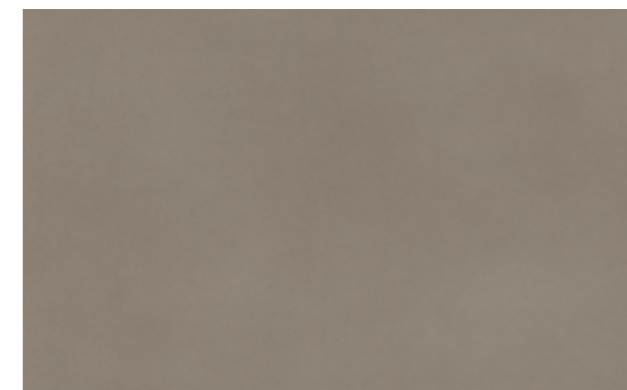**Glue:** DB00099-1 (XXL)**Glue:** DB00099-2 (XL)**Glue:** DB00099-3 (L)**Solid Umbra**

Sand structure  
 Skirting board 19/58: 30060435 (white)

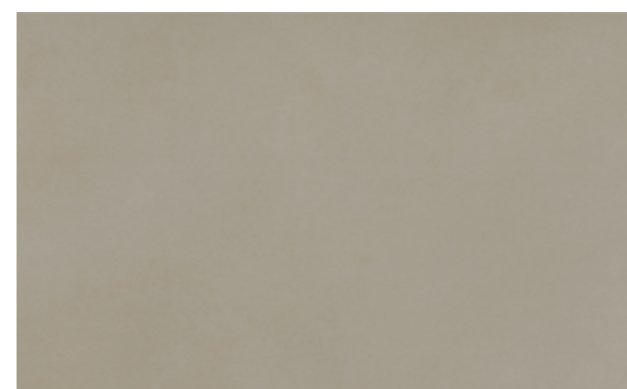**Glue:** DB00098-1 (XXL)**Glue:** DB00098-2 (XL)**Glue:** DB00098-3 (L)**Solid Sand**

Sand structure  
 Skirting board 19/58: 30060435 (white)

**Glue:** DB00100-1 (XXL)**Glue:** DB00100-2 (XL)**Glue:** DB00100-3 (L)**Solid Light**

Sand structure  
 Skirting board 19/58: 30060435 (white)

**Glue:** DB00101-1 (XXL)**Glue:** DB00101-2 (XL)**Glue:** DB00101-3 (L)**Solid White**

Sand structure  
 Skirting board 19/58: 30060435 (white)

**Glue:** DB00102-1 (XXL)**Glue:** DB00102-2 (XL)**Glue:** DB00102-3 (L)**Solid Black**

Sand structure  
 Skirting board 19/58: 30060435 (white)

**Glue:** DB00103-1 (XXL)**Glue:** DB00103-2 (XL)**Glue:** DB00103-3 (L)



**Mosaic Dark**  
1 strip | Sand structure  
Skirting board 19/58: 30060435 (white)

Glue: DB00093



**Mosaic Light**  
1 strip | Sand structure  
Skirting board 19/58: 30060435 (white)

Glue: DB00092



**Infinity Dark Solid**  
1-strip | Exclusive wood structure  
Skirting board 19/58: 30060548

Glue: DB00073



**Infinity Light Solid**  
1-strip | Exclusive wood structure  
Skirting board 19/58: 30060549

Glue: DB00074



**Infinity Dark Mixed\***  
1-strip | Exclusive wood structure  
Skirting board 19/58: 30060435 (white)


Glue: DB00071



**Infinity Light Mixed\***  
1-strip | Exclusive wood structure  
Skirting board 19/58: 30060435 (white)

Glue: DB00072

\* Mixed = various plank colours in one box

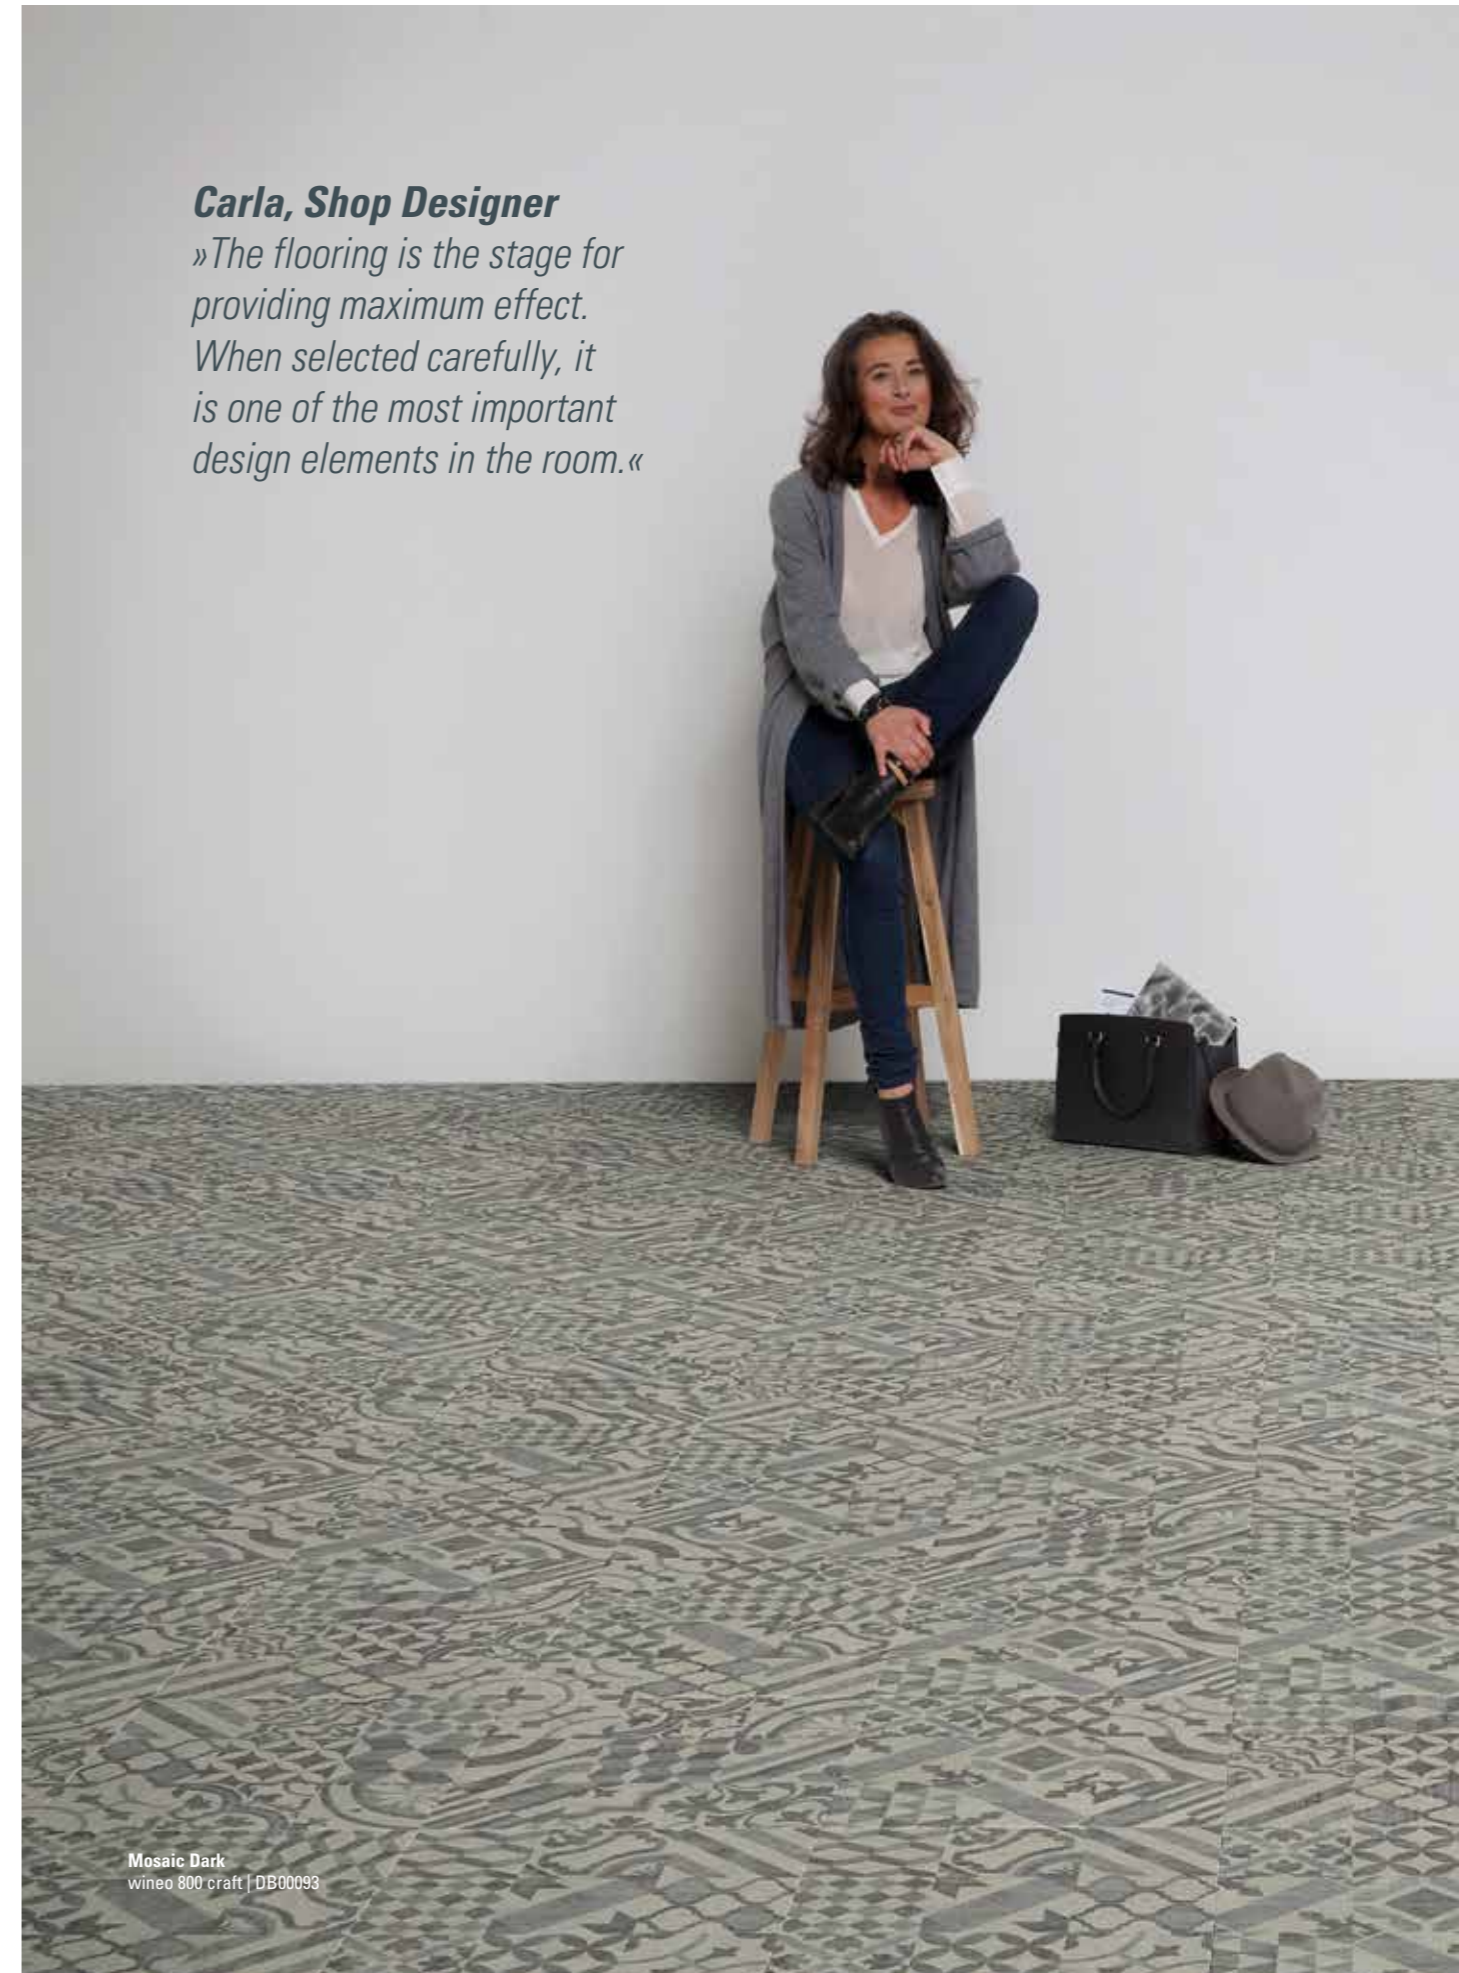

**Carla, Shop Designer**  
»The flooring is the stage for providing maximum effect. When selected carefully, it is one of the most important design elements in the room.«

Mosaic Dark  
wineo 800 craft | DB00093

# ACCESSORIES

## COLOUR-MATCHING AND PLAIN-COLOURED SKIRTING BOARDS

Our range of accessories includes suitable skirting boards which perfectly match the decors of the wineo Design Flooring. Plain skirting, which can be universally combined with all designs, is also available. You can find advice on suitable skirting boards on the preceding collection pages and in our accessories brochure.



**Skirting board 19 / 58**  
MDF base  
19 x 58 x 2400 mm  
PU = 4 units



All white skirting boards can be painted!

## CLIPHOLDER FASTENING SYSTEM

In order to install wineo skirting boards quickly and easily, we recommend using the Clipholder fastening system. This system enables cables to be invisibly routed and can be removed without any problems whenever you would like to paint or wallpaper the walls.



**Clipholder | Art.-no. 30020241**  
PU = 30 clips / approx. 15 metres  
Minimum order size = 1 PU

## FEATURE STRIPS

wineo feature strips (width 5 mm) can be used on all design flooring for gluing to enhance the natural plank or tile look. The format of the individual elements is emphasised, creating a joint effect.



You can find more detailed information in our Accessories Brochure, which you can also view online:

[www.wineo.de/en/service/downloads](http://www.wineo.de/en/service/downloads)

## UNDERLAY MATERIAL

We recommend using our silentPREMIUM or silentCOMFORT insulation mats with wineo Design Flooring – the ideal underlay material made **from up to 90% natural raw materials** for even more comfort and optimum acoustics.

- outstanding and long-lasting impact sound qualities
- punctual conformability
- increased ease of installation
- perfect for underfloor heating
- **silentPREMIUM: no additional adhesive material necessary due to the self-adhesive surface**

wineo silentPREMIUM insulation mat for wineo Design Flooring for gluing



wineo silentCOMFORT insulation mat for wineo Design Flooring for clicking in



## ALUMINIUM PROFILES

wineo profiles are ideal for creating a neat finish between floors and walls, adjacent thresholds or other components. They form a smooth transition, close expansion gaps and are available in classic metal looks as well as in various wood designs. You can see an overview of all the available transition, adjustment and end profiles in the Accessories Brochure.

TRANSITION PROFILES



ADJUSTMENT PROFILES



END PROFILES



# SERVICE

We work with distributors, architects, property developers and anyone who appreciates great floor coverings. That's why we offer a wide range of services. If you would like to be kept regularly up to date, just take a look at YouTube, Facebook, Twitter or Pinterest.



## TECHNICAL SUPPORT

Do you have any questions about our products, where they can be used or regarding installation? Do not hesitate to contact your distributor. They will be happy to help you!



## MARKETING SUPPORT

We have a **wide range of samples and printed materials** to help with product presentation and sales promotion at the POS. You can get an overview of all our presentation tools, from brochures to displays, in our **"ADVERTISING WITH WINEO"** sales promotion brochure. Of course we can also coordinate with you to fulfil your **individual requirements**. Don't hesitate to get in touch!




## NEWSLETTER

Stay in touch with us: it's easy to sign up for the wineo newsletter on our website. This will guarantee that you don't miss out on anything and will always be kept up to date.

## COMPANY BLOG

Get some inspiration and find out even more about our products, references and events. Discover it now at:

**[blog.wineo.de/en](http://blog.wineo.de/en)**

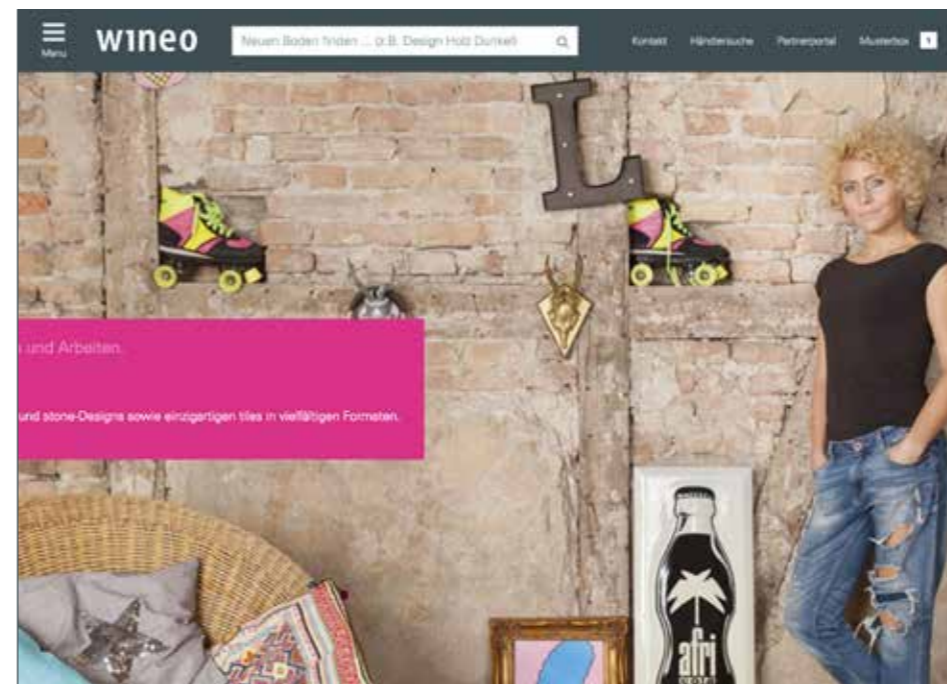

## EN.WINEO.DE

- information and references as well as relevant downloads on the products
- product search by characteristic, colour, format, installation height and utilisation class
- find a retailer
- video portal with plenty of tips and tricks, such as installation instructions



# QUALITY

wineo – That's flooring. We meet requirements head on and come up with great ideas. That's what makes us the ideal choice when it comes to creating a comfortable lifestyle, dealing with demanding projects and creating successful businesses. Our business focuses on quality, service and the power of innovation.


## Tested quality

Since wineo flooring has to fulfill the highest requirements, it must undergo a strict quality control process. From worldwide suppliers of raw materials right through to the finished and packaged product, our floorings are subjected to a 7-stage quality control process subject to the highest standards. This means that we can guarantee that our quality products, which have been recognised by several awards, continue to set standards in the future.

## High level of responsibility


As a family business in the third generation, we have a high level of social and ecological responsibility. Consistent availability of goods, intense user and marketing support, expert advice and permanent product improvement as well as development are what make wineo stand out and ensure the trust and security of our market partners worldwide.

# wineo



### CE marking

The CE marking confirms that our product has been tested and that it meets all EU requirements in terms of safety, healthcare and environmental protection.



### A+

Just like the "Blue Angel" in Germany, the A+ seal identifies our products as ecological, healthy and user friendly in the French market.



### PEFC (valid for Multi-Layer)

The PEFC quality seal is based on very strict guidelines for managing our forests in a sustainable manner and guarantees that timber is used from verified cultivation sources. The entire product manufacturing process - from the raw materials through to the ready-to-use end product - is certified and verified by independent assessors.



### TFI-TÜV PROFICERT PREMIUM

The TFI (Textiles & Flooring Institute GmbH) and TÜV Hessen evaluate products from a quality, health and ecological point of view. Essentially, products can only be certified if they present no health risk.



**factory** made  
**coated**



# COLLECTION OVERVIEW

Collection	wineo 400 wood			wineo 400 wood XL			wineo 400 stone			wineo 600 wood		wineo 600 wood XL		wineo 600 stone		wineo 600 stone XL		wineo 800 wood		wineo 800 wood XL		wineo 800 stone XL		wineo 800 tile			wineo 800 craft			
	Multi-Layer			Multi-Layer			Multi-Layer																	L	XL	XXL				
Installation type	Glue	Click	Click	Glue	Click	Click	Glue	Click	Click	Glue	Click	Glue	Click	Glue	Click	Glue	Click	Glue	Click	Glue	Click	Glue	Click	Glue	Glue	Glue	Glue	Glue		
Core board	-	-	Aqua-Protect®	-	-	Aqua-Protect®	-	-	Aqua-Protect®	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-		
Format	1200 × 180 mm	1212 × 187 mm	1222 × 182 mm	1505 × 235 mm	1507 × 235 mm	1520 × 230 mm	609.6 × 304.8 mm	600 × 316 mm	601 × 310 mm	1200 × 180 mm	1212 × 187 mm 1212 × 185 mm (DLC00011)	1505 × 235 mm	1505 × 237 mm	609.6 × 304.8 mm	600 × 317 mm	900 × 450 mm	914 × 480 mm	1200 × 180 mm	1212 × 185 mm	1505 × 235 mm	1505 × 237 mm	914.4 × 457.2 mm	914 × 480 mm	457.2 × 457.2 mm	914.4 × 457.2 mm	914.4 × 914.4 mm	457.2 × 457.2 mm	914.4 × 914.4 mm		
Product thickness	2 mm	4.5 mm	9 mm	2 mm	4.5 mm	9 mm	2 mm	4.5 mm	9 mm	2 mm	5 mm	2 mm	5 mm	2 mm	5 mm	2 mm	5 mm	2.5 mm	5 mm	2.5 mm	5 mm	2.5 mm	5 mm	2.5 mm	5 mm	2.5 mm	5 mm	2.5 mm		
Wear layer	0.3 mm	0.3 mm	0.3 mm	0.3 mm	0.3 mm	0.3 mm	0.3 mm	0.3 mm	0.3 mm	0.4 mm	0.4 mm	0.4 mm	0.4 mm	0.4 mm	0.4 mm	0.4 mm	0.4 mm	0.55 mm	0.55 mm	0.55 mm	0.55 mm	0.55 mm	0.55 mm	0.55 mm	0.55 mm	0.55 mm	0.55 mm	0.55 mm		
Planks or tiles / box	18/3.89 m <sup>2</sup>	10/2.27 m <sup>2</sup>	9/2.00 m <sup>2</sup>	12/4.24 m <sup>2</sup>	6/2.12 m <sup>2</sup>	6/2.10 m <sup>2</sup>	18/3.34 m <sup>2</sup>	12/2.28 m <sup>2</sup>	9/1.68 m <sup>2</sup>	18/3.89 m <sup>2</sup>	8/1.81 m <sup>2</sup> 8/1.79 m <sup>2</sup> (DLC00011)	12/4.24 m <sup>2</sup>	6/2.14 m <sup>2</sup>	18/3.34 m <sup>2</sup>	10/1.90 m <sup>2</sup>	12/4.86 m <sup>2</sup>	6/2.63 m <sup>2</sup>	16/3.46 m <sup>2</sup>	8/1.79 m <sup>2</sup>	12/4.24 m <sup>2</sup>	6/2.14 m <sup>2</sup>	10/4.18 m <sup>2</sup>	6/2.63 m <sup>2</sup>	16/3.34 m <sup>2</sup>	10/4.18 m <sup>2</sup>	6/5.02 m <sup>2</sup>	16/3.34 m <sup>2</sup>	20/1.86 m <sup>2</sup>		
Boxes / pallet	60/233.40 m <sup>2</sup>	48/108.96 m <sup>2</sup>	44/88.00 m <sup>2</sup>	64/271.36 m <sup>2</sup>	52/110.24 m <sup>2</sup>	52/109.20 m <sup>2</sup>	60/200.40 m <sup>2</sup>	48/109.44 m <sup>2</sup>	60/100.80 m <sup>2</sup>	60/233.40 m <sup>2</sup>	64/115.84 m <sup>2</sup> 64/114.56 m <sup>2</sup> (DLC00011)	64/271.36 m <sup>2</sup>	56/119.84 m <sup>2</sup>	72/240.48 m <sup>2</sup>	60/114.00 m <sup>2</sup>	50/243.00 m <sup>2</sup>	44/115.72 m <sup>2</sup>	75/259.50 m <sup>2</sup>	64/114.56 m <sup>2</sup>	60/254.40 m <sup>2</sup>	56/119.84 m <sup>2</sup>	40/167.20 m <sup>2</sup>	44/115.72 m <sup>2</sup>	52/173.68 m <sup>2</sup>	40/167.20 m <sup>2</sup>	37/185.74 m <sup>2</sup>	52/173.68 m <sup>2</sup>	135/251.10 m <sup>2</sup>		
Surface treatment	PU	PU	PU	PU	PU	PU	PU	PU	PU	PU	PU	PU/UV	PU/UV	PU	PU	PU	PU	PU	PU	PU	PU	PU	PU	PU	PU	PU	PU	PU		
Bevelled edge	■	■	-	■	■	-	-	-	-	-	-	-	-	-	-	-	-	■	■	■	■	-	■	■	■	■	■	■		
Real joint	-	-	-	-	-	-	-	■	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-			
Utilisation classes   EN ISO 10874	23/31	23/31	23/31	23/31	23/31	23/31	23/31	23/31	23/31	23/31	23/32/41	23/32/41	23/32/41	23/32/41	23/32/41	23/32/41	23/32/41	23/33/42	23/33/42	23/33/42	23/33/42	23/33/42	23/33/42	23/33/42	23/33/42	23/33/42	23/33/42	23/33/42		
Binder content   EN ISO 10582	Type I																													
Reaction to fire   EN 13501-1	B <sub>n</sub> - s1	B <sub>n</sub> - s1	B <sub>n</sub> - s1	B <sub>n</sub> - s1	B <sub>n</sub> - s1	B <sub>n</sub> - s1	B <sub>n</sub> - s1	B <sub>n</sub> - s1	B <sub>n</sub> - s1	B <sub>n</sub> - s1	B <sub>n</sub> - s1	B <sub>n</sub> - s1	B <sub>n</sub> - s1	B <sub>n</sub> - s1	B <sub>n</sub> - s1	B <sub>n</sub> - s1	B <sub>n</sub> - s1	B <sub>n</sub> - s1	B <sub>n</sub> - s1	B <sub>n</sub> - s1	B <sub>n</sub> - s1	B <sub>n</sub> - s1	B <sub>n</sub> - s1	B <sub>n</sub> - s1	B <sub>n</sub> - s1	B <sub>n</sub> - s1	B <sub>n</sub> - s1	B <sub>n</sub> - s1		
Anti slip category   DIN 51130	R 9																													
Slip resistance   EN 13893	μ ≥ 0.30 - DS																													
Anti-static properties   EN 1815	≤ 2 kV																													
Staining / Chemical resistance   EN ISO 26987	High resistance level depending on concentration and exposure time.																													
Light fastness   EN ISO 105-B02 (procedure 2)	≥ 6																													
Residual indentation   EN ISO 24343-1 in combination with silentPREMIUM	≤ 0.1 mm ~ 0.17 mm	≤ 0.1 mm -	≤ 0.1 mm -	≤ 0.1 mm ~ 0.17 mm	≤ 0.1 mm -	≤ 0.1 mm -	≤ 0.1 mm ~ 0.17 mm	≤ 0.1 mm -	≤ 0.1 mm -	≤ 0.1 mm ~ 0.17 mm	≤ 0.1 mm -	≤ 0.1 mm ~ 0.17 mm	≤ 0.1 mm -	≤ 0.1 mm ~ 0.17 mm	≤ 0.1 mm -	≤ 0.1 mm ~ 0.17 mm	≤ 0.1 mm -	≤ 0.1 mm ~ 0.17 mm	≤ 0.1 mm -	≤ 0.1 mm ~ 0.17 mm	≤ 0.1 mm -	≤ 0.1 mm ~ 0.17 mm	≤ 0.1 mm -	≤ 0.1 mm ~ 0.17 mm	≤ 0.1 mm -	≤ 0.1 mm ~ 0.17 mm	≤ 0.1 mm ~ 0.17 mm	≤ 0.1 mm ~ 0.17 mm		
Castor chair test   ISO 4918	25000 revolutions, no damage with rolls type W																													
Suitability for underfloor heating	Suitable for all conventional hot water underfloor heating and electrical systems regulated up to a surface temperature of 27° C.																													
Thermal resistance (m <sup>2</sup> K)/W   EN 12667 in combination with silentCOMFORT in combination with silentPREMIUM	~ 0.011 - ***	~ 0.012 ~ 0.022 -	≤ 0.058 - -	~ 0.011 - ***	~ 0.012 ~ 0.022 -	≤ 0.058 - -	~ 0.011 - ***	~ 0.012 ~ 0.022 -	≤ 0.058 - -	≤ 0.011 - ***	≤ 0.021 ≤ 0.031 -	≤ 0.011 - -	≤ 0.021 ≤ 0.031 -	≤ 0.011 - -	≤ 0.021 ≤ 0.031 -	≤ 0.011 - -	≤ 0.021 ≤ 0.031 -	≤ 0.015 - -	≤ 0.021 ≤ 0.031 -	≤ 0.015 - -	≤ 0.021 ≤ 0.031 -	≤ 0.015 - -	≤ 0.021 ≤ 0.031 -	≤ 0.015 - -	≤ 0.021 ≤ 0.031 -	≤ 0.015 - -	≤ 0.021 ≤ 0.031 -	≤ 0.015 - -		
Impact sound reduction   EN ISO 16251-1 in combination with silentCOMFORT	~ 4 dB -	~ 7 dB ≤ 14 dB	*** -	~ 4 dB -	~ 7 dB ≤ 14 dB	*** -	~ 4 dB -	~ 7 dB ≤ 14 dB	*** -	~ 4 dB -	~ 7 dB ≤ 14 dB	~ 4 dB -	~ 7 dB ≤ 14 dB	~ 4 dB -	~ 7 dB ≤ 14 dB	~ 4 dB -	~ 7 dB ≤ 14 dB	~ 4 dB -	~ 7 dB ≤ 14 dB	~ 4 dB -	~ 7 dB ≤ 14 dB	~ 4 dB -	~ 7 dB ≤ 14 dB	~ 4 dB -	~ 7 dB ≤ 14 dB	~ 4 dB -	~ 7 dB ≤ 14 dB	~ 4 dB -		
Dimensional stability   EN ISO 23999	***	***	***	***	***	***	***	***	***	~ 0.15 %	~ 0.1 %	~ 0.15 %	~ 0.1 %	~ 0.15 %	~ 0.1 %	~ 0.15 %	~ 0.1 %	~ 0.15 %	~ 0.1 %	~ 0.15 %	~ 0.1 %	~ 0.15 %	~ 0.1 %	~ 0.15 %	~ 0.1 %	~ 0.15 %	~ 0.1 %	~ 0.15 %		
Guarantee for private use according to Windmüller warranty conditions	15 years	15 years	15 years	15 years	15 years	15 years	15 years	15 years	15 years	20 years	20 years	20 years	20 years	20 years	20 years	20 years	20 years	25 years	25 years	25 years	25 years	25 years	25 years	25 years	25 years	25 years	25 years	25 years		
Designs	18			12			10			14		10		4		4		9		9		10		8			2		4	
Page	22 – 25			26 – 27			28 – 29			34 – 35		36 – 37		38 – 39		40 – 41		48 – 51		48 – 51		54 – 55		56 – 57			58 – 59			

\*\*\* Currently undergoing testing.

All decors shown in this brochure are reproductions. Windmüller GmbH provides no guarantee with regard to mistakes, printing errors and technical changes.

# SYMBOLS

## INSTALLATION TYPES



Glue (Dryback)



Click (Connect locking system)



Click (LocTec® locking system)

## PRODUCT FEATURES



Resistance to staining



Suitability for chair castors



Suitability for underfloor heating



Suitability for damp areas



Bevelled edge



Real joint



PU surface coating



UV surface coating



Insulation mat Sound-Protect Eco

## UTILISATION CLASSES



Utilisation class 23:  
Heavy-duty use  
in the domestic area




Utilisation class 31:  
Medium use  
in the commercial sector




Utilisation class 32:  
Normal use  
in the commercial sector



Utilisation class 33:  
Heavy-duty use  
in the commercial sector



Utilisation class 41:  
Medium use  
in the light industrial sector  
(vehicular traffic excluded)



Utilisation class 42:  
Normal use  
in the light industrial sector

## GUARANTEE



15 year guarantee (for private application)



20 year guarantee (for private application)



25 year guarantee (for private application)

**Windmüller GmbH**

Nord-West-Ring 21

D-32832 Augustdorf

Tel.: +49 (0) 52 37 609 - 0

Fax: +49 (0) 52 37 609 - 309

info@wineo.de

**www.wineo.de**

Handed over by:

Product no. 20090846 | 04/2018

# wineo